



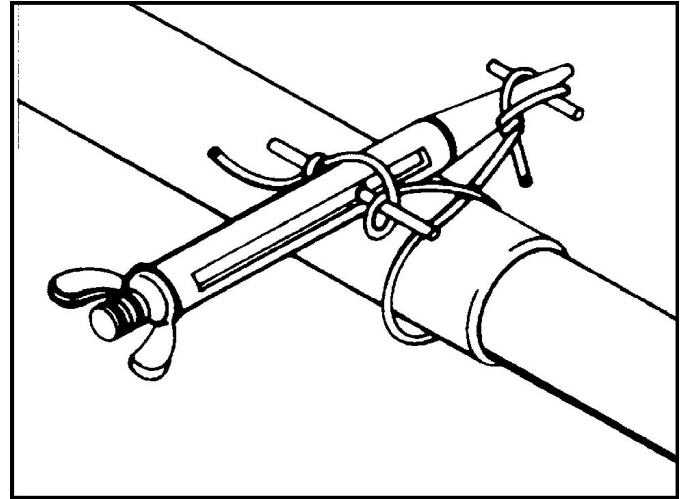


# CLAMP ANYTHING... ANY SIZE, ANY SHAPE, ANYWHERE

## INSTRUCTIONS FOR A SINGLE WRAP CLAMP

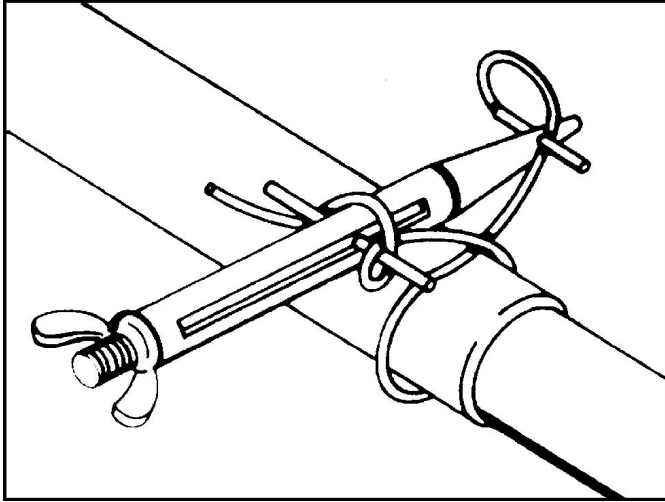

**STEP 1:** INSERT END OF WIRE INTO FRONT PIN ON THE LEFT HAND SIDE. BRING WIRE OVER THE NOSE, AND IN FRONT OF FORWARD PIN ON THE RIGHT HAND SIDE. WRAP WIRE AROUND HOSE (AS MANY WRAPS AS DESIRED). BRING WIRE OVER THE TOP OF THE WRAPS, AND AROUND THE REAR PIN ON THE RIGHT HAND SIDE. THEN TAKE WIRE OVER THE TOP OF THE TOOL AND AROUND THE PIN ON THE LEFT HAND SIDE.

**STEP 1: (ALTERNATE METHOD)** PLACE LOOP OF WIRE AROUND NOSE, AND TWIST TO TIGHTEN. WRAP WIRE AROUND HOSE (AS MANY WRAPS AS DESIRED). BRING WIRE OVER THE TOP OF THE WRAPS, AND AROUND THE REAR PIN ON THE RIGHT HAND SIDE. THEN TAKE WIRE OVER THE TOP OF THE TOOL AND AROUND THE PIN ON THE LEFT HAND SIDE.

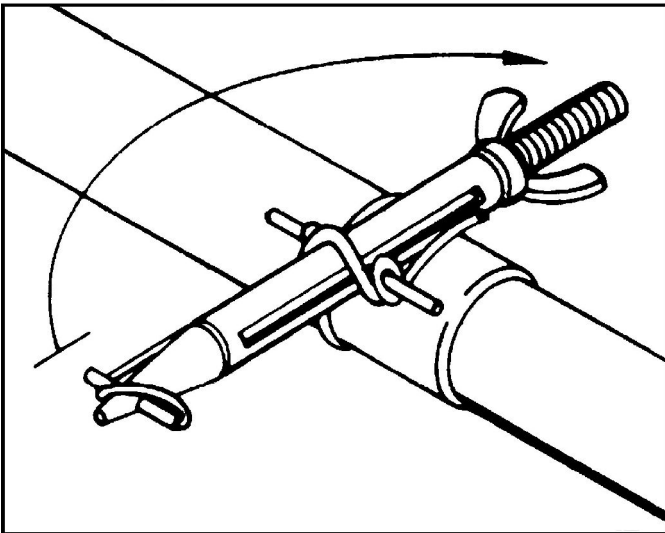

**STEP 2:** TURN WINGNUT TO TIGHTEN. WHEN CLAMP HAS REACHED DESIRED TENSION, ROTATE TOOL 180 DEGREES TO LOCK CLAMP. LOOSEN WINGNUT AND REMOVE CLAMP TITE TOOL. CLIP WIRE ENDS ABOUT 1/4 INCH FROM CLAMP, AND PUSH DOWN TOWARDS HOSE.

THE THREE ILLUSTRATIONS SHOWN ARE FOR A MORE SIMPLIFIED SINGLE STRAND WRAP FOR A FAST AND EASY FIX. THIS METHOD WILL ALLOW FOR AS MANY WRAPS AS DESIRED.

### LUBE THREADS BEFORE USING

WE RECOMMEND STAINLESS STEEL WIRE FOR IT'S STRENGTH AND DURABILITY

YOUR IMAGINATION IS THE ONLY LIMIT FOR USES OF THE CLAMP TITE TOOL.

[www.akcooltools.com](http://www.akcooltools.com)